


Data sheet - M5-61 R SK ST

FASTEKS FILKO® - blind rivet nuts countersunk head 90° / knurled shank / open

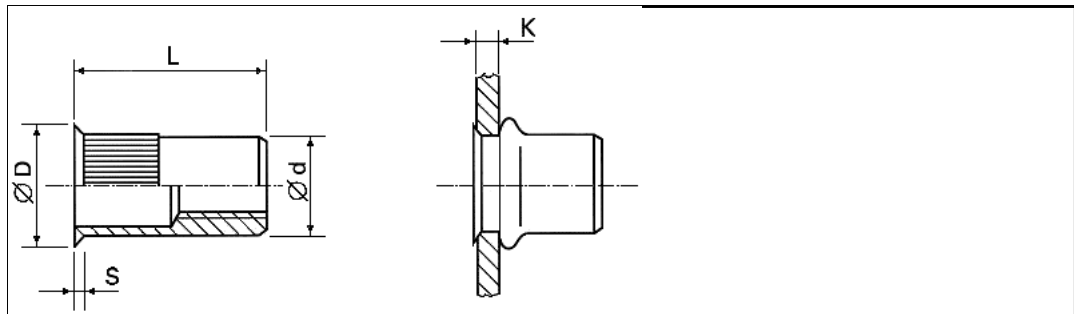

3D-Data available	
Order description	M5-61 R SK ST
Thread	M5
Grip range K	4.0-6.0 mm
Mounting hole-Ø +0,1	7.0 mm
Ø d	7.0 mm
Ø D	10.0 mm
S	1.5 mm
L	15.0 mm
Material	Steel Surface protection: Galvanized with thick coating passivation (RoHS compliant)
Hint	Countersinking of the drilled hole is necessary
	Other dimensions and materials on request

uniform resource locator: